



MATING CONN. REQUIRED:
AMP PIN 206037-1 CONN.
WITH 66102-6 TERMINALS
& 206070-1 CABLE CLAMP
(FOR -2 MODEL ONLY)

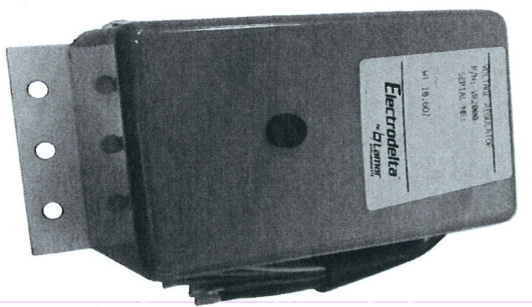

VR2000 - 28-2 & -2A (28V)

- NOTES:
1. Open the alternator control sw. before connecting or disconnecting the regulator/alt. cont. unit.
 2. If greater voltage regulation accuracy is desired, the yellow wire, (Pin 6) (point of regulation) may be routed to a location closer to any voltage sensitive equipment power bus, and must be connected to a separate circuit breaker.
 3. Input Pin 7 (orange wire) is power in for the protection circuits and must be connected to a separate circuit breaker, fused at the shunt.
 4. Wires from shunt connection should be twisted together and Weight is .7LBS MAX.

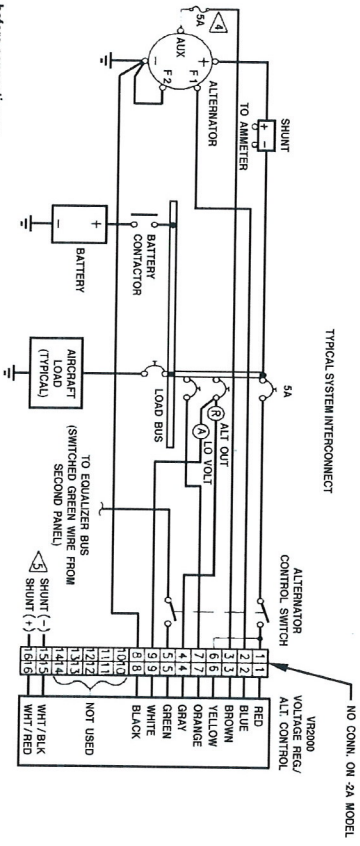

RECOMMENDED INTERFACE WIRING:
VR2000-28-2 VOLTAGE REGULATOR (28 VOLT)
VR2000-28-2A VOLTAGE REGULATOR (28 VOLT)

ORIGINAL

Electrodelta™

by **Lamar Technologies LLC**

Lamar Technologies LLC
14900 40th Ave, NE
Marysville, WA 98271
360-651-6666

VR2000-28-2,2A Data Sheet